

Update Instructions

The AT-GAIN-60 can only be updated through the web GUI.



IMPORTANT: As of this writing, Google Chrome is the only browser that is supported for firmware updates. Other browsers will be supported in future versions of firmware.

Required items:

- Firmware
- IP address of the AT-GAIN-60
- Computer on the same network as the AT-GAIN-60
- Username and password to access the web GUI


1. Verify that an Ethernet cable is connected between the AT-GAIN-60 and the network. The computer used to access the web GUI must be on the same network as the AT-GAIN-60.
2. Type the IP address of the AT-GAIN-60 into the web browser, as shown in the example below.




3. The login screen will be displayed. Login using the username and password. The default login credentials are:

Username: admin

Password: Atlona

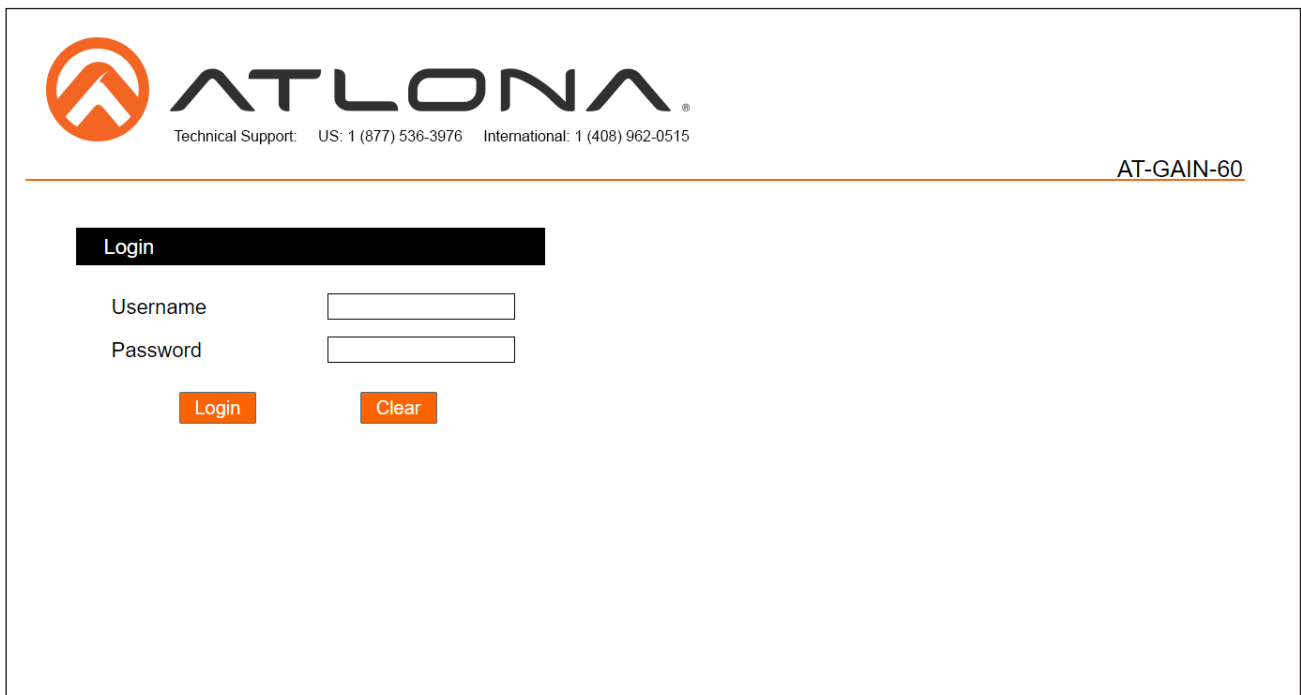

 **ATLONA**
Technical Support: US: 1 (877) 536-3976 International: 1 (408) 962-0515

AT-GAIN-60

Login

Username

Password

Update Instructions

- Click **Status** in the menu bar on left side of the screen.
- Click the **Save** button.




The screenshot shows the Atlona web interface. The left sidebar has a menu with 'Home', 'Settings', and 'Configuration'. Under 'Settings', 'Status' and 'Firmware' are listed. Under 'Configuration', 'Audio' and 'Logout' are listed. The main content area has a header with the Atlona logo and technical support information. Below the header, there's a 'System Information' section with a 'Download Log' button. The table below shows system details:

System Information	
Model	AT-GAIN-60
Firmware	1.0.03
MAC Address	B8 98 B0 05 E1 2E
Serial Number	0800304818042600003
Operating Time	0000:00:42:04

Below the table is a 'System Settings' section with a 'Save' button. It includes an 'Upload File' section with a 'Status' input field and 'Browse' and 'Load' buttons.

- The **Save As** dialog box will be displayed. Select the folder where the file will be saved. Click the **Save** button to save the file. The file is saved in .bin format and uses the default name of systemsettings.bin.
- Click **Firmware** on the left side of the screen.

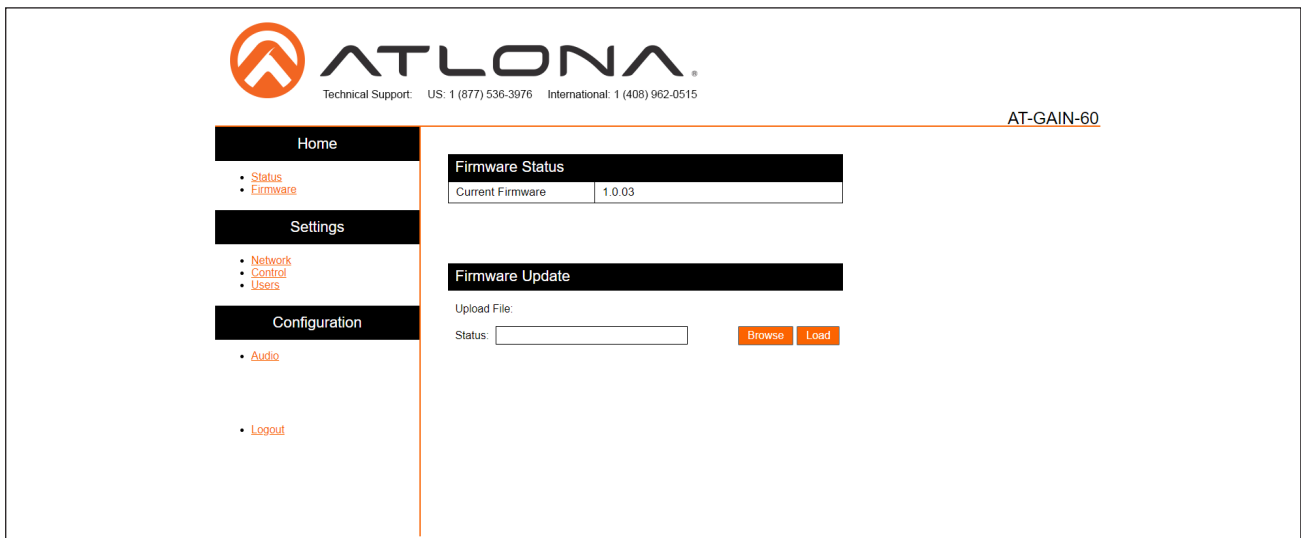

The screenshot shows the Atlona web interface with the 'Firmware' option selected in the left sidebar. The main content area has a header with the Atlona logo and technical support information. Below the header, there's a 'Firmware Status' section with a table showing the current firmware version:

Firmware Status	
Current Firmware	1.0.03

Below the table is a 'Firmware Update' section with an 'Upload File' section. It includes a 'Status' input field and 'Browse' and 'Load' buttons.

- Click the **Browse** button to select the firmware file.
- Click the **Load** button to begin the upgrade process. Once the update has been completed, the login screen will be displayed.



WARNING: Power must not be disconnected or interrupted during the firmware update process.