


## Update Instructions

Updating the firmware can be completed using either the USB interface or the web GUI. Atlona recommends using the web GUI for updating the firmware. However, If a network connection is not available, the AT-HDR-M2C-QUAD firmware can be updated using a USB-A to USB mini-B cable.


### Using the Web GUI

#### Requirements

- AT-HDR-M2C-QUAD
  - Firmware file (.bin file)
  - Computer
1. Connect an Ethernet cable from the computer, containing the firmware, to the same network where the AT-HDR-M2C-QUAD is connected.
  2. Go to the System page in the web GUI.

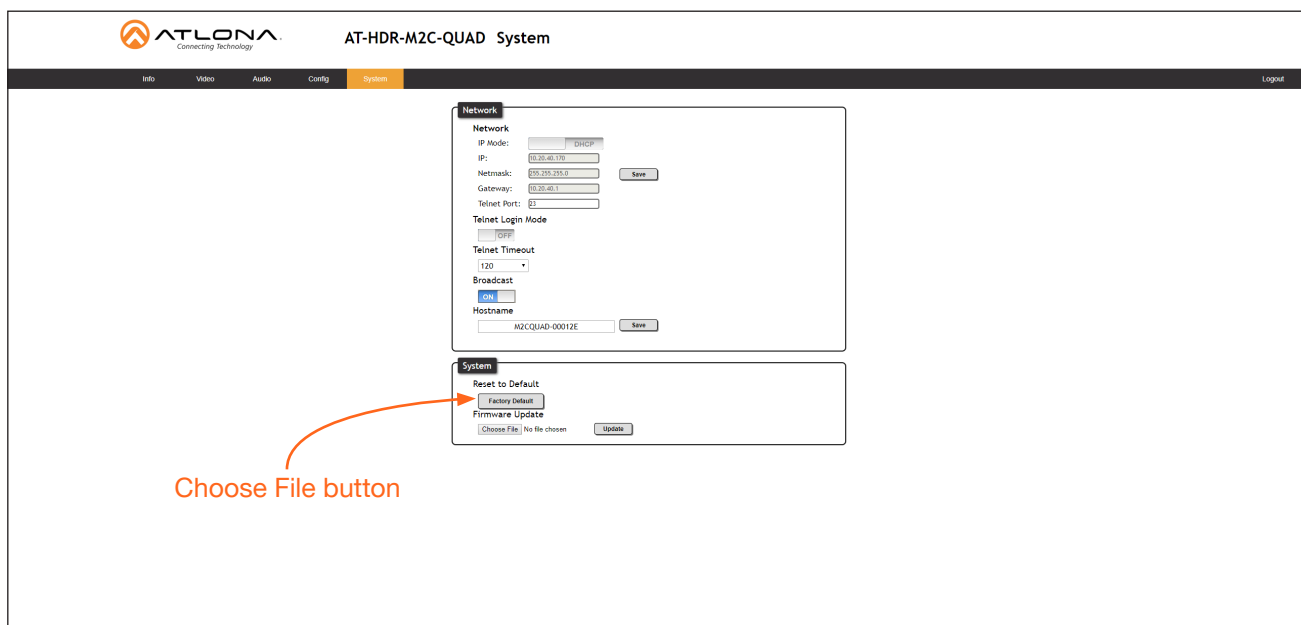


3. Click the **Choose File** button, under the **Firmware Update** section.
4. Browse to the location of the firmware file, select it, and click the **Open** button.
5. Click the **Update** button.
6. The following dialog will be displayed.

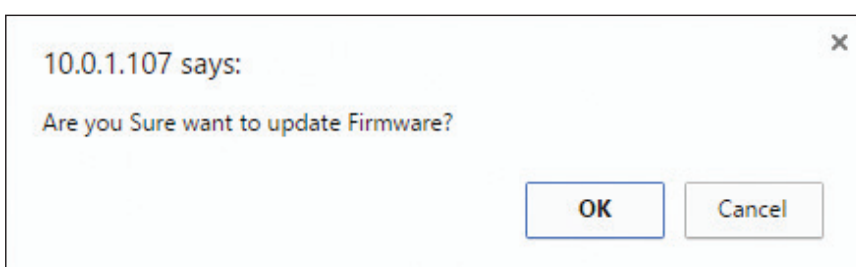

## Update Instructions

7. Click the **OK** button to begin the firmware update process. Click the **Cancel** button to abort the process.
8. The update process will take approximately 60 seconds and will automatically reboot the AT-HDR-M2C-QUAD. During the update process, the **PWR** LED indicator will flash.
9. After the firmware update process is complete, the **Login** screen will be displayed.

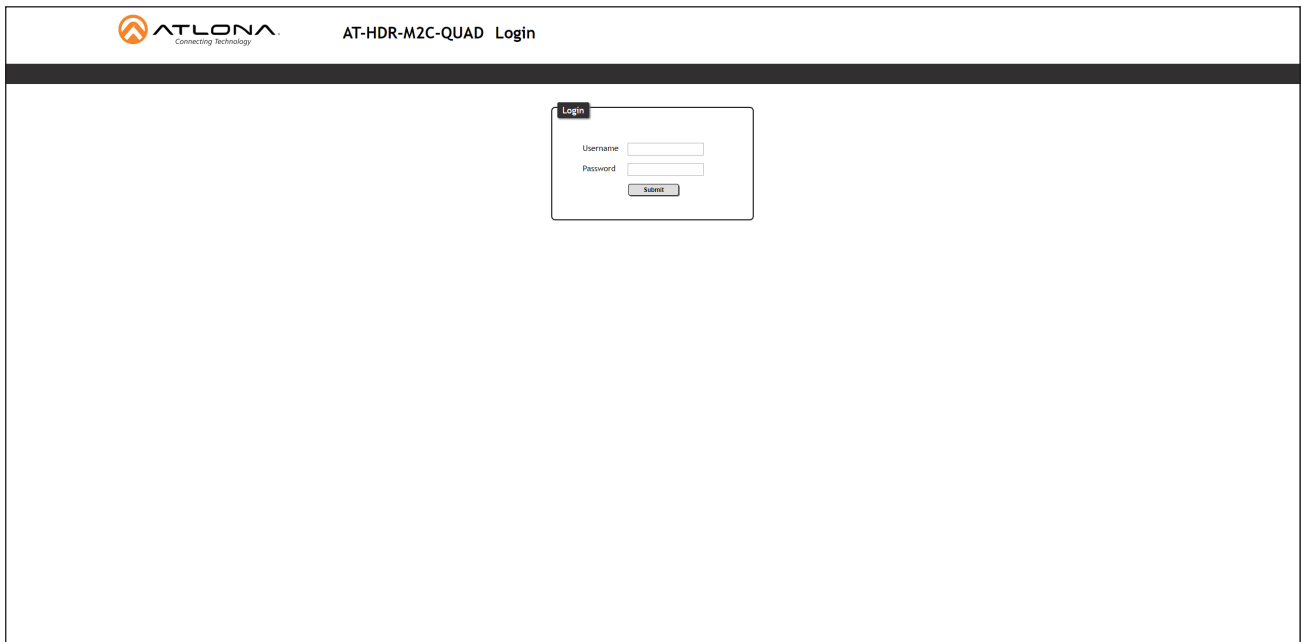

ATLONA  
Connecting Technology

AT-HDR-M2C-QUAD Login

Login

Username

Password


# Update Instructions

## Using USB

### Requirements

- AT-HDR-M2C-QUAD
- Firmware file (.bin file)
- Computer
- USB-A to USB mini-B cable

1. Power-off the AT-HDR-M2C-QUAD.
2. Connect the USB-A to USB mini-B cable from the computer to the **FW** port on the rear panel of the AT-HDR-M2C-QUAD.
3. Power-on the AT-HDR-M2C-QUAD. After a few moments, a USB Drive folder will be displayed. If this folder is not displayed, automatically, select the USB UPDATE drive from Windows Explorer, as shown below.

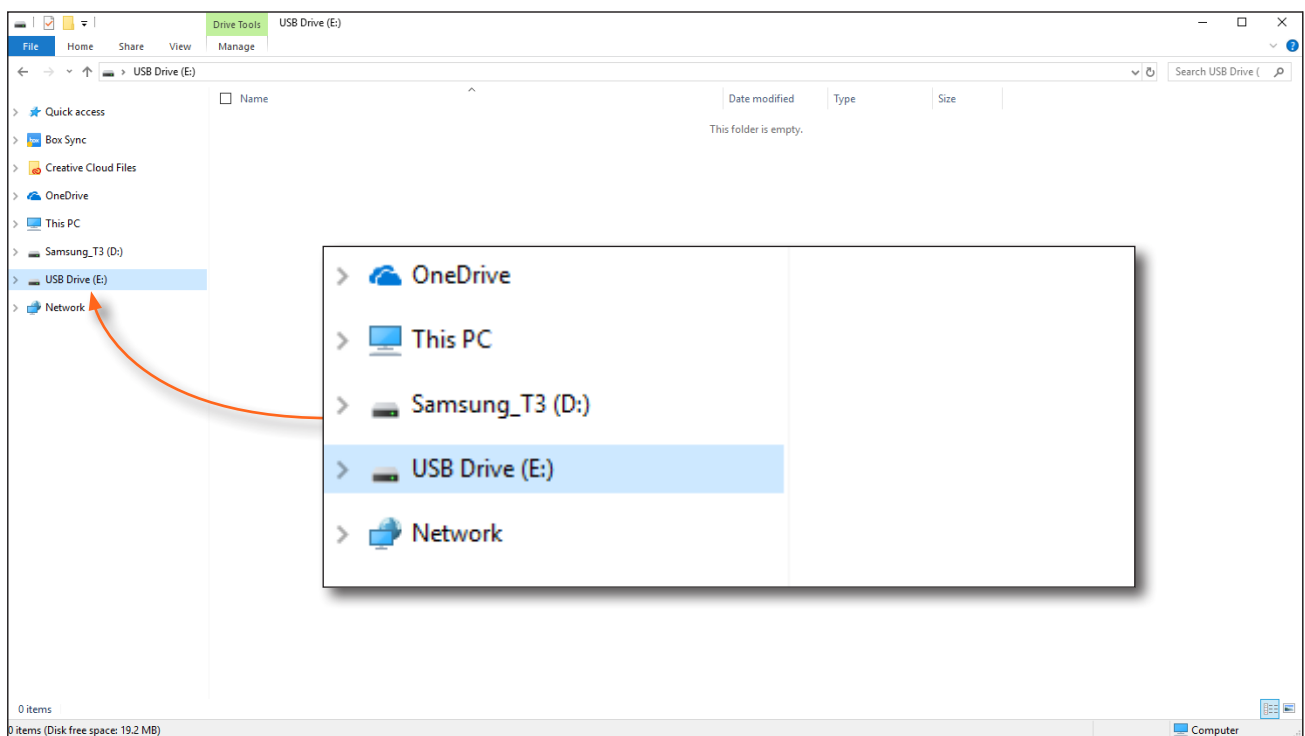

4. Delete all files from the USB Drive folder, if any are present.
5. Drag-and-drop the firmware file to the drive.
6. The RESET LED indicator, on the rear panel, will flash green during the update procedure. Wait for the LED to turn solid green.
7. The AT-HDR-M2C-QUAD will automatically reboot, completing the firmware update process.
8. Disconnect the USB cable from both the computer and the AT-HDR-M2C-QUAD.
9. The firmware update process is complete.